

Timing Chain



Single strand

Chain type		Chain figure
Bushed type	BS-type	
	BF-type	
Roller type	RF-type	

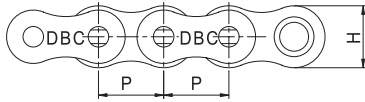
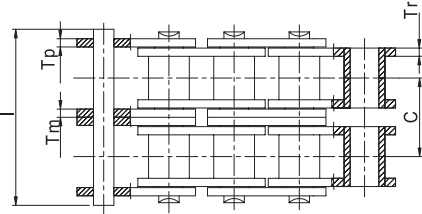
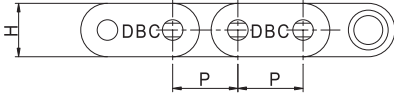
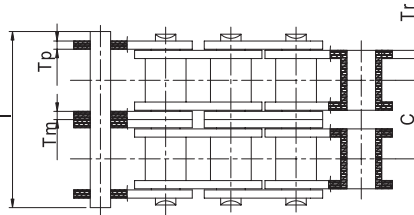
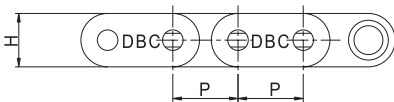
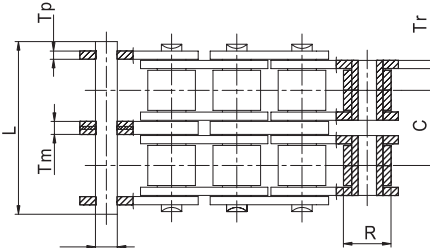
unit : mm

DONG BO CHAIN NO.	ISO NO.	Chain Type	Pitch P	Bushing or Roller Dia B or R	Inner Width W	Plate			Pin		Breaking Load Kgf/(KN)	Approx Weight (g/link)
						Tp	Tr	H	D	L		
DBC 25	04C	BS	6.35	3.30	3.18	0.75	0.75	5.84	2.31	7.6	450(4.4)	0.9
DBC 25H	-	BS	6.35	3.30	3.18	0.75	1.0	5.84	2.31	8.2	600(5.9)	1.0
DBC 25H	-	BF	6.35	3.30	3.18	0.75	1.0	5.84	2.31	8.2	600(5.9)	1.1
DBC 04M	-	BF	7.00	4.00	3.50	1.0	1.15	6.8	2.70	9.6	800(7.8)	1.8
DBC 05M	-	BS	7.774	4.59	4.90	1.0	1.27	7.5	3.05	11.5	880(8.6)	2.3
DBC 05M	-	BF	7.774	4.59	4.90	1.0	1.27	7.5	3.05	11.5	910(8.9)	2.4
DBC 05MA	-	BF	7.774	4.59	4.90	1.0	1.27	7.5	3.05	11.5	950(9.3)	2.4
DBC 05MH	-	BS	7.774	4.59	4.90	1.27	1.50	7.5	3.05	12.5	1000(9.8)	2.5
DBC 05T	-	BF	8.00	4.73	4.61	1.0	1.27	7.8	3.05	11.5	880(8.6)	2.5
DBC 05TA	-	BF	8.00	4.73	4.61	1.0	1.27	7.8	3.05	11.5	950(9.3)	2.5
DBC 06B	06B	RF	9.525	*6.35	5.72	1.0	1.27	8.26	3.28	13.5	1050(10.3)	3.7
DBC 06B-WR	-	RF	9.525	*6.35	5.72	1.0	1.27	8.26	3.28	13.5	1050(10.3)	3.7
DBC 06E	-	RF	9.525	*6.35	5.72	1.15	1.37	8.26	3.28	14.0	1250(12.3)	4.2
DBC 06H	-	BF	9.525	6.35	5.10	1.6	2.1	9.3	3.50	15.1	1500(14.7)	5.6
DBC 46	-	BS	12.70	6.60	6.35	1.50	1.50	11.9	3.97	14.7	1780(17.4)	6.7

* Roller Diameter

Timing Chain

Double strand

Chain type		Chain figure	
Bushed type	BS-type		
	BF-type		
Roller type	RF-type		

unit : mm

DONG BO CHAIN NO.	ISO NO.	Chain Type	Pitch P	Bushing or Roller Dia B or R	Inner Width W	Plate				Pin		Transverse Pitch C	Breaking Load Kg/(KN)	Approx Weight (g/link)
						Tp	Tr	Tm	H	D	L			
DBC 25-2	04C-2	BS	6.35	3.30	3.18	0.75	0.75	0.75	5.84	2.31	14.0	6.4	840(8.2)	1.7
DBC 35-2	06A-2	BS	9.525	5.08	4.78	1.25	1.25	1.25	9.0	3.59	22.8	10.1	2000(19.6)	6.6
DBC 36-2	-	BS	9.525	5.64	4.78	1.27	1.27	1.27	9.0	3.59	22.8	10.1	2000(19.6)	6.8
DBC 05T-2	-	BF	8.00	4.73	4.61	1.0	1.27	1.27	7.8	3.05	20.5	8.79	1550(15.2)	4.8
DBC 06B-2	06B-2	RF	9.525	*6.35	5.72	1.0	1.27	1.6	8.26	3.28	23.8	10.24	1880(18.4)	7.0
DBC 06D-2	-	BF	9.525	6.35	5.72	1.27	1.27	1.6		3.97	24.0	10.24	2250(22.1)	8.1
DBC 46-2	-	BS	12.70	6.60	6.35	1.5	1.5	1.5	11.9	3.97	27.5	12.8	3670(36.0)	13.2

*Roller Diameter